

This is **G o o g l e**'s cache of <http://building-repair-materials.home-items-portal.com/1-US-Gallon-Endure-Permanent-Exterior-House-Paint-3535666.html> as retrieved on Apr 4, 2004 21:09:38 GMT.
G o o g l e's cache is the snapshot that we took of the page as we crawled the web.
 The page may have changed since that time. Click here for the [current page](#) without highlighting.
 This cached page may reference images which are no longer available. Click here for the [cached text](#) only.
 To link to or bookmark this page, use the following url: http://www.google.com/search?q=cache:z1AWOHkFI_sJ:building-repair-materials.home-items-portal.com/1-US-Gallon-Endure-Permanent-Exterior-House-Paint-3535666.html+viscosity+%22house+paint%22+centipoise&hl=en

Google is not affiliated with the authors of this page nor responsible for its content.

These search terms have been highlighted: **viscosity house paint centipoise**

Other Items: 1 US Gallon Endure Permanent Exterior House Paint

Search




See more on eBay

The World's Online Marketplace(TM)

1 US Gallon Endure Permanent Exterior House Paint

Category: Building & Repair Materials / Paint & Painting Supplies / Other Items

Current Price	\$ 8
Minimum To Bid:	\$ 8
Start Time:	1/1/1900
End Time:	3/29/2004
Location:	Ft Lauderdale, FL
Country	us
Quantity	1

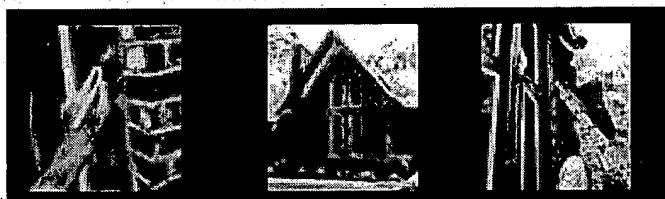

C
to S



Other Items: 1 US Gallon Endure Permanent Exterior House Paint

Description

Contact us at 1-888-600-8997 Endure Permanent Paint is a durable exterior coating that can be applied to any in place of ordinary house paints. Once properly applied the permanent exterior coating is guaranteed to resist

blistering, flaking, cracking, or chalking for a lifetime. Endure Permanent Paint looks like normal **house paint** o performs like a permanent protective shield on the exterior of a home. It not only has lab tests to prove itâ™s quality, but it has also passed the test of time. Tests have shown that the permanent coating, unlike normal ho stretch up to 600% of itâ™s original size allowing it to extend with the expansion and contraction of the surfa covering making the coating extremely resilient. Endure Permanent Coating is up to ten times as thick as norm allowing it to withstand the most rigorous elements of weather. The permanent coating is also waterproof, and and mildew. Because of these properties, Endure Permanent Paint will adhere to any paintable surface for a l a **MAINTENANCE FREE EXTERIOR!** Endure Permanent Paint is a new revolutionary exterior coating that giv what they highly desireâ™ a maintenance free exterior for their home. Eliminate the reoccurring expense and h the outside of your house forever. Protect and beautify your home with Endure Permanent Paint. Most homeo desire a maintenance free exterior. They donâ™t want the hassle and expense of repainting their house aga Exterior painted surfaces last an average of only five years before the paint begins to show signs of failure wh house paints. As a result, exterior painting is a very costly expense that reoccurs every 5 to 7 years. Endure P can eliminate this ongoing maintenance for homeowners. The permanent coating is guaranteed to never chip, peel, chalk, or fade for a lifetime. Because the permanent coating is maintenance free for a lifetime, homeown thousands upon thousands of dollars by permanently eliminating the expense of repainting their homeâ™. **FOR** surfaces can Endure Permanent Paint be applied over? Endure Permanent Paint can be applied to any surfac house paints can be applied to. This includes wood, brick, mason block, stucco, stone, concrete, as well as al vinyl siding. What colors are available for Endure Permanent Paint? Endure Permanent Paint can be tinted to a available for normal house paints. What does Endure Permanent Paint look like when itâ™s on my house? E Permanent Paint looks like normal **house paint** when itâ™s on the surface of a home. It has a satin finish, a to any color that normal paint can be tinted to. What makes Endure Permanent Paint last a lifetime? Endure Pe was formulated to sustain the harshest elements of weather and has lab tests to prove it. Endure Permanent P times as thick as normal house paints making it very resilient to extreme weather conditions. It can also stretc itâ™s normal size without cracking, chipping, or peeling. The permanent coatingâ™s water proof qualities e moisture problems, which is the number one reason why normal house paints fail. What has to be done to the applying Endure? The area has to be thoroughly washed in order to remove dirt and dust from the surface. Ne scraped and sanded in order to remove any peeling paint that is on the surface. Caulking is applied over crack in order to properly seal the area. After these steps are completed your house is ready for the application of E Permanent Paint. What is the cost versus aluminum or vinyl siding? Endure Permanent Paint is typically less e aluminum or vinyl siding, yet will last as long while giving your home the appearance of being freshly painted f Characteristics Observations Weight per gallon: 12.1# ASTM D-1475. This is a very dense, not watered down maximum density, build, yield, and durability. Solids Weight: 72% ASTM D-2369. Water is light, resins and pig heavier. Solids Volume: 58% ASTM D-2697. High build and high yield due to low water content. Versus Typica Ceramic Coating is a resin-rich material that outperforms typical paint in durability, adhesion, flexibility, film bu long term performance. Flammability ASTM D-2863. Non-Flammable and does not support combustion on ce Finished Film Smooth with good flow and leveling to prevent brush marks. **Viscosity** Heavy bodied for good fi yet easy to apply by roller or sprayer. 20-25Kcps (20,000+ centipoise) Brookfield viscometer. Tint Base Avail Pastel/Medium and Deep for a wide range of color tinting options while using a minimum of colorants which co affect dry times. Product Stability Product remains stable and usable for one year or longer depending on amb environment. Toxicity Non-Toxic nor is it a health hazard when used as directed. Contains NO Lead or Chrom Product cures to a tough, yet flexible wear resistant surface while preventing chipping. Abrasion Resistance E resistant to typical environmentally induced abrasion. Touch-up Easy to touch up and repair in the event of ex damage. Co-Product Availability Endure Ceramic Coating is designed for use over the Endure Adhesive Bond the Endure Caulk/Sealant. Other clear sealants are available for shingle roofs, exposed aggregate and other s requiring beautification and protection. Impact Resistance Exceeds 20 inch pounds of impact with no effect. E D-2370. Exceeds 200% elongation with 100% memory. Flexibility ASTM D-1737. Exceeds 1/8â™ mandrel be cracking, chipping or flaking. Dirt Pickup Endure Coatings have a soft sheen that prevents dirt and stains bette paints or coatings. The surface is tighter and special additives repel stains and dirt for a beautiful lookâ™ long Transmission ASTM D-1654. Twenty (20) perms allow water vapor to leave the film but prevent water liquid fr through the coating film. Wind Driven Rain NO water penetrated a 12 dry mil film during 24 hours propelled by hour wind! Salt Spray Resistant ASTM D-1654. Exceeds 250 continuous hours with no evidence of peeling, b deterioration. High Humidity Resistant Exceeds 250 continuous hours with no evidence of peeling, blistering o from the substrate. Fungus/Mildew Resistant NO growth after inoculated with 4 active microorganisms in an e humidity environment. Weathering ASTM D-822 / G-26. No deterioration of the coating film, no cracking, chalk peeling after simulated 20 year weathering cycle. Composition Single component Urethane modified Acrylic w thinning or post added components for use. Coverage Benefit High build at 100 sf/gal/coat on smooth surface process. Porous surfaces require more coating. Dry Film Yield One coat at 18 wet mils yields 10 dry mils of du 2 coats recommended. Substrate Preparation Clean, dry, solid, primed surfaces yield GREAT results and incr

Application Temperature Range Best applied at 390F to 980F for greater daily coating application and product Methods Brush, roller or airless sprayer for larger areas. Cure Time(tack-free) Dependent on Relative Humidity temperature for air drying, between 10 minutes and 30 minutes. Cure Time(primary) Dependent on Relative Humidity temperature for air drying, between 24 to 36 hours. Cure Time(complete) Dependent on Relative Humidity and air drying, between 7 to 10 days. Solvent System Used Safe, pure water. No other solvents or additives required to accomplish extraordinary results. Adhesive Strength ASTM C-794. Exceptional Adhesion to properly prepared substrates. Cohesive Strength Exceptional Cohesive strength for strong inter-coat adhesion to itself. Color Re be tinted to over 5000 colors with clear reproduction and consistent tint strength. Sunlight Stability Contains no or resins that can yellow with age and exposure to UV light. Texture Endure Ceramic Coating yields a beautiful finish that hides imperfections in the underlying substrate and leaves a pleasing soft finish. Purity Filtered for easy spraying without clogs. Endure Permanent Paint coverage is 80-100 square feet per gallon. 50 Gallons is what home will need to apply two coats. Call us at (888) 600-8997 with any questions. Contact us at 1-888-600-899 at 07:46:45 PST, seller added the following information: SquareTrade Â© AP6.0

Place a Bid!

NEW - A PORTFOLIO OF FLOORING IDEAS BOOK

L@@K 2-Craftsman Oval Glue Sticks-Formula 300

CRAFTSMAN 2 GARAGE DOOR OPENER REMOTES

Blanco Undermount Kitchen Sink 510-882

DELTANA SATIN NICKEL HINGE PAIR

Salt Box House Plans Colonial Plan + Free Garage

Cabinet Hardware - SN Rope Knobs- DKS

TURBO DELUXE POWER WASH JET CLEANING SPRAYER

1 US Gallon Endure Permanent Exterior House Paint
